
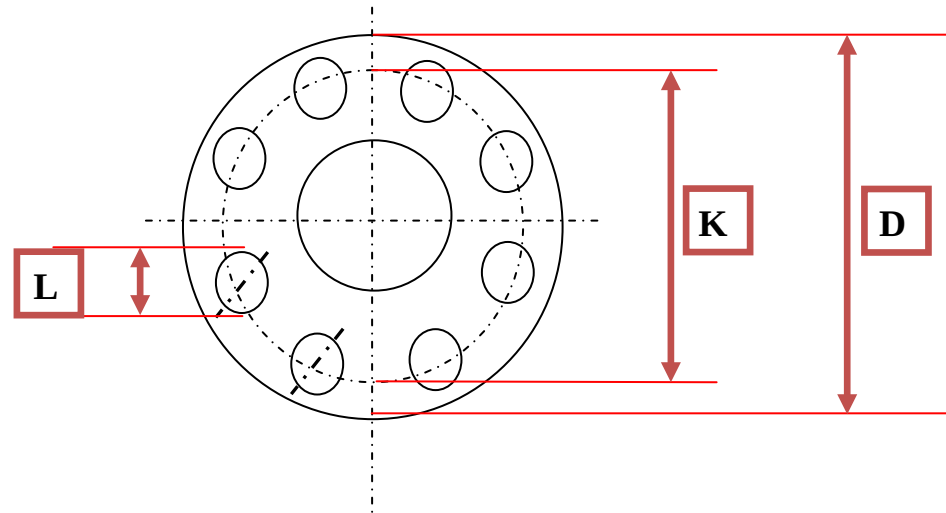
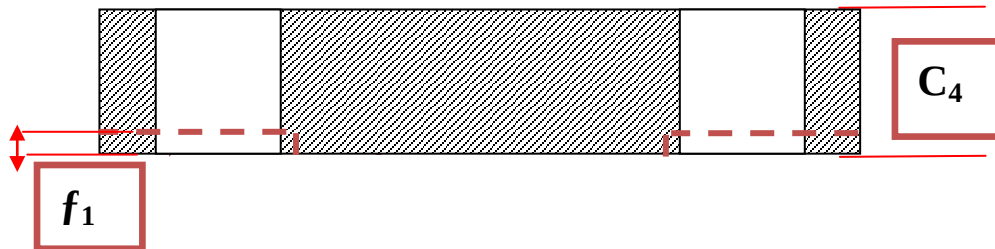


Flange PN-6 Dimensions ISO-7005-1TYPE 05 – BLINDTYPE 01-SLIP ONMARKING ACC ISO-7005-1/EN1092-1:

STANDARD(ISO7005/EN1092-1) , SIZE(IN INCH) , PN6 , MATERIAL ,
MANUFACTURER NAME OR BRAND , HEAT No, TYPE OR KIND(SO,BLIND).

SIZE (inch)	DN SIZE (mm)	MATCHING DIMENSIONS					BORE DIM (B ₁)	FLANGE THICKNESS		FACING DIM d ₁	RF DIM f ₁	TOLERANCES				
		(D)	(K)	(L)	BOLTS			C ₁	C ₄			B ₁	C _{1,4}	d ₁	f ₁	K
					No.	Size nominal										
3/8	10	75	50	11	4	M10	18	12	12	35	2	+0.5	-1.5	1- / +2	-1	±1
1/2	15	80	55	11	4	M10	22	12	12	40	2	+0.5	-1.5	1- / +2	-1	±1
3/4	20	90	65	11	4	M10	27.5	14	14	50	2	+0.5	-1.5	1- / +2	-1	±1
1	25	100	75	11	4	M10	34.5	14	14	60	2	+0.5	-1.5	1- / +2	-1	±1
1-1/4	32	120	90	14	4	M12	43.5	16	14	70	2	+0.5	-1.5	1- / +2	-1	±1
1-1/2	40	130	100	14	4	M12	49.5	16	14	80	3	+0.5	-1.5	1- / +2	-2	±1
2	50	140	110	14	4	M12	61.5	16	14	90	3	+0.5	-1.5	1- / +2	-2	±1
2-1/2	65	160	130	14	4	M12	77.5	16	14	110	3	+0.5	-1.5	1- / +2	-2	±1
3	80	190	150	18	4	M16	90.5	18	16	128	3	+0.5	-1.5	1- / +2	-2	±1
4	100	210	170	18	4	M16	116	18	16	148	3	+0.5	-1.5	1- / +2	-2	±1
5	125	240	200	18	8	M16	141.5	20	18	178	3	+1	-1.5	1- / +2	-2	±1
6	150	265	225	18	8	M16	170.5	20	18	202	3	+1	-1.5	1- / +2	-2	±1
8	200	320	280	18	8	M16	221.5	22	20	258	3	+1	-1.5	1- / +2	-2	±1
10	250	375	335	18	12	M16	276.5	24	22	312	3	+1	-1.5	1- / +2	-2	±1
12	300	440	395	22	12	M20	327.5	24	22	365	4	+1	-1.5	1- / +3	-3	±1
14	350	490	445	22	12	M20	359.5	26	22	415	4	+1	-1.5	1- / +3	-3	±1
16	400	540	495	22	16	M20	411	28	22	465	4	+1.5	-1.5	1- / +3	-3	±1
18	450	595	550	22	16	M20	462	30	24	520	4	+1.5	-1.5	1- / +3	-3	±1
20	500	645	600	22	20	M20	513.5	30	24	570	4	+1.5	-1.5	1- / +3	-4	±1
24	600	755	705	26	20	M24	616.5	32	30	670	5	+1.5	-1.5	1- / +3	-4	±1.5
28	700	860	810	26	24	M24	720	40	40	775	5	+3	-1.5	1- / +3	-4	±1.5
32	800	975	920	30	24	M27	822	44	44	880	5	+3	-1.5	1- / +3	-4	±1.5
36	900	1075	1020	30	24	M27	921	48	48	980	5	+3	-1.5	1- / +3	-4	±1.5
40	1000	1175	1120	30	28	M27	1027	52	52	1080	5	+3	-2	1- / +3	-4	±1.5

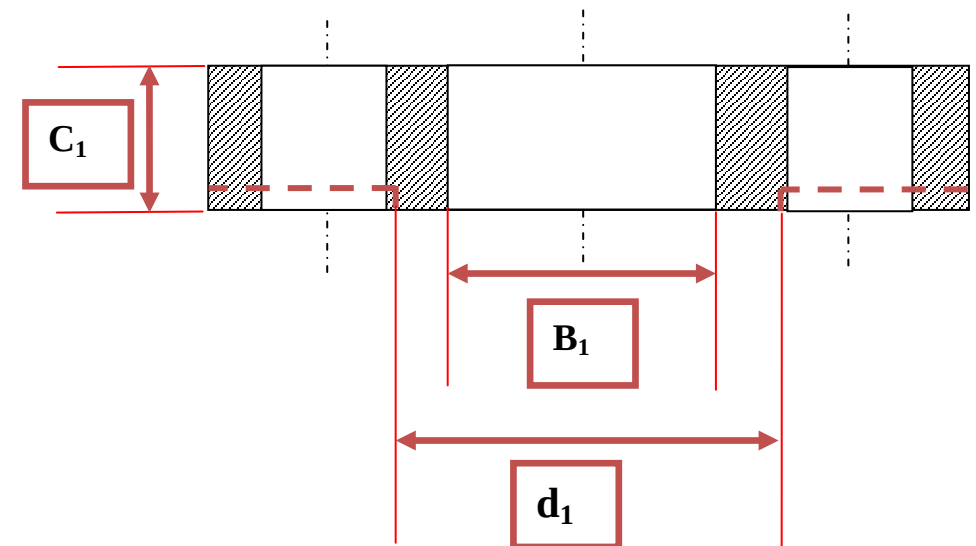

Mendelson – S.Bar Ltd.

E-Mail: info@mlsbar.com Web Site: www.mlsbar.co.il



[ALL SIZES ARE IN MM] AVAILABLE UP TO 3600 MM [142"]-4

EXAMPLE OF MARKING-SLIP ON 3"

ISO7005/EN1092-1, 3" , PN6 , material, MANUFACTURER NAME OR BRAND , HEAT No, TYPE 01 S.O

EXAMPLE OF MARKING-BLIND 3"

ISO7005/EN1092-1, 3" , PN6 , material , MANUFACTURER NAME OR BRAND , HEAT No, TYPE 05 BLIND